

## TECHNICAL SPECIFICATIONS

### DIMENSIONS

Length of vehicle	3,800 mm
Length with attachments	6,600 mm
Width, 2,5 m version	2,500 mm
Width, 2,8 m version	2,800 mm
Width, 3,1 m version	3,100 mm
Width of tiller (with side wings/without side wings)	
• 2,3 m version	3,250/4,230 mm
• 2,5 m version	3,520/4,500 mm
• 2,8 m version	3,700/4,680 mm
• 3,1 m version	4,100/5,030 mm
Height of vehicle	2,720 mm
Height with cab tilted	3,040 mm
Rear deck	1,690 x 2,000 mm
Width of tracks, 2,5 m version	870 mm
Width of tracks, 2,8 m version	1,020 mm
Width of tracks, 3,1 m version	1,170 mm
Ground clearance	310 mm

### DIESEL ENGINE

Manufacturer	DaimlerChrysler AG
Type	Mercedes Benz OM 904 LA Euromot III A
Power	80/1269/EEC 129 kW (176 hp) at 2,200 rpm
Max. torque	675 Nm at 1,200-1,600 rpm
No. of cylinders	4
Total displacement	4,250 cc
Fuel consumption	8,5 l
Tank capacity	110 l

### WEIGHTS


Weight without tracks	3,200 kg
Max. permissible weight	5,800 kg
Useful load without attachments	1,000 kg

### TECHNICAL DATA HUSKY CABIN

Weight of passenger cabin with up to 11 seats	450 kg
Max. permissible weight of vehicle with cabin Incl. attachments	5,800 kg
Cabin with hydraulic tilt mechanism	
Automatic alarm for open cabin door	
Middle row removable	

### ACCESSORIES

L230 compactor for Husky with 2,500 mm working width  
L310 compactor for Husky with 2,800 / 3,100 mm working width  
Pair of summer tracks 250 cm

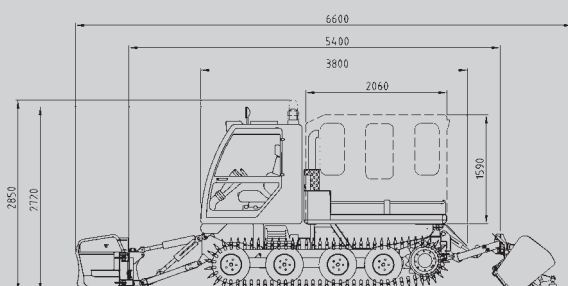

### OPERATING DATA

Turning circle	0 (counter-rotation)
Spec. ground contact pressure, 2,5 m version	0,059kg/cm <sup>2</sup>
Spec. ground contact pressure, 2,8 m version	0,053kg/cm <sup>2</sup>
Spec. ground contact pressure, 3,1 m version	0,048kg/cm <sup>2</sup>

### CONTROLS

Drive	Hydrostatic, closed loop, digital electronic controls
Travel speed	0-25 km/h

### CAB

- Light-metal construction
- ROPS certification (roll-over protection)
- ISRINGHAUSEN seats
- Driver's seat and two passenger seats
- Safety belts for driver and passengers
- Tilt cab
- Driving wheel

### WINDSHIELD/WINDOWS/MIRRORS

- Electrically heated windshield and side and rear windows
- Electrically heated outside rear view mirrors

### RADIO

- Radio/CD player with stereo speakers

### LIGHTS

- 4 double parabolic metal halide headlights
- 2 rear working lights
- Sidelights and indicators
- 1 double parabolic spotlight

### ELECTRICAL SYSTEM

Operating voltage	24V
Batteries	2x12 V / 74 Ah
Cold cranking amps	650A
Alternator Bosch	28V 100A

### HEATING/VENTILATION

Hot-water air heater with blower and automatic temperature control

### INSTRUMENTS

Analogue

### BLADE

12-way blade with quick-release system

### TILLER


X-country trail tiller with 2 independent tracksetters in various widths

### OPTIONAL EQUIPMENT

- Passenger cabin
- Front-mounted snowblower
- Compactor bar with x-country tracksetters
- All-season tracks

### HUSKY CABIN OPTIONALS

Intercom between passenger cabin and driver's D5s cab  
Passenger cabin loudspeakers for radio and stereo systems  
Odometer and speedometer

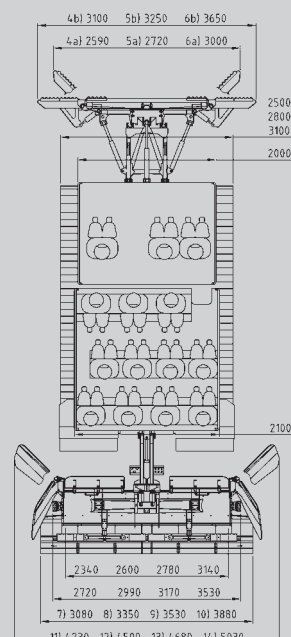

PRINOTH®, Mercedes Benz®, Bosch®, Isringhausen® are registered trademarks.

Subject to change without further notice due to technical improvements.